

# Kivirinki



**Oil Pattern Distance:** 40 Feet      **Reverse Brush Drop:** 40 Feet      **Oil Per Board:** 50 uL  
**Forward Oil Total:** 16.15 mL      **Reverse Oil Total:** 7.8 mL      **Volume Oil Total:** 23.95 mL  
**Forward Boards Crossed:** 323 Boards      **Reverse Boards Crossed:** 156 Boards      **Total Boards Crossed:** 479 Boards

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	3	18	111	0.0	5.1	5.1	5550
2	7L	7R	1	18	27	5.1	7.6	2.5	1350
3	8L	8R	2	18	50	7.6	12.7	5.1	2500
4	10L	10R	3	18	63	12.7	20.3	7.6	3150
5	11L	11R	2	18	38	20.3	25.4	5.1	1900
6	12L	12R	2	18	34	25.4	30.5	5.1	1700
7	2L	2R	0	22	0	30.5	36.0	5.5	0
8	2L	2R	0	22	0	36.0	40.0	4.0	0

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	30	0	40.0	28.0	-12.0	0
2	12L	12R	2	18	34	28.0	22.9	-5.1	1700
3	11L	11R	2	18	38	22.9	17.8	-5.1	1900
4	10L	10R	4	18	84	17.8	7.6	-10.2	4200
5	2L	2R	0	14	0	7.6	0.0	-7.6	0

Conditioner:  
Type In or Select One

TransferType:  
Type In or Select One

Forward




Reverse



Combined



Buff

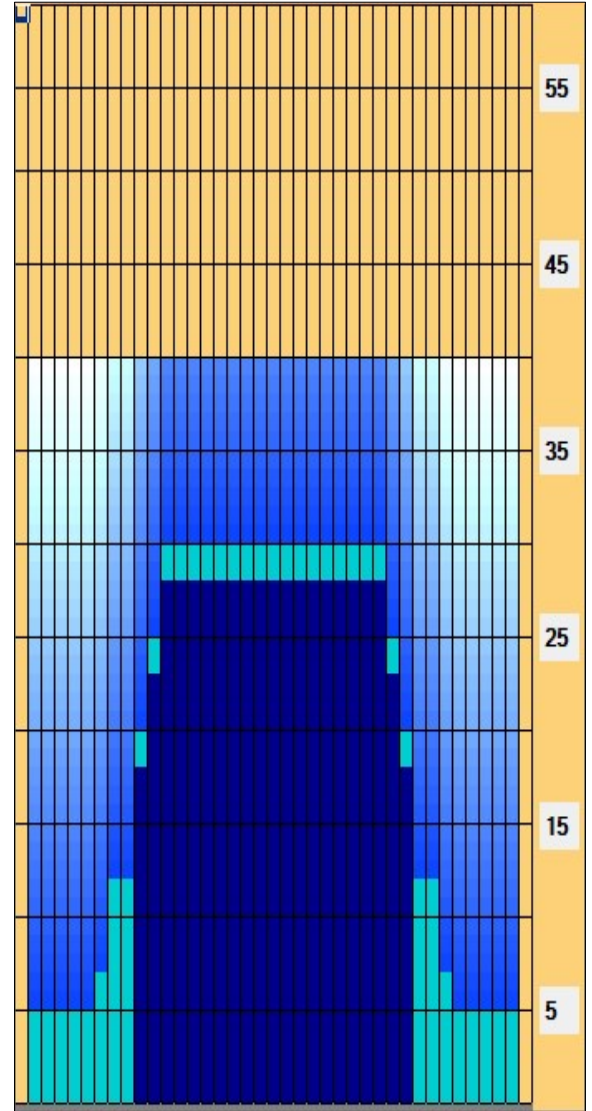

Item Description	3L-7L:18L-18R Outside Track:Middle	8L-12L:18L-18R Middle Track:Middle	13L-17L:18L-18R Inside Track:Middle	18L-18R:17R-13R Middle: Inside Track	18L-18R:12R-8R Middle:Middle Track	18L-18R:7R-3R Middle:Outside Track
Track Zone Ratio	6.56	1.67	1	1	1.67	6.56

